

Wifi Configuration

When you have uploaded your code and the device starts up for the first time, it will spit out a bunch of messages saying it can't find a saved wifi network. Let's fix that!

```
.....
*wm:Connect Wifi, ATTEMPT # 2 of 6
*wm:No wifi saved, skipping
*wm:Connect Wifi, ATTEMPT # 3 of 6
*wm:No wifi saved, skipping
*wm:Connect Wifi, ATTEMPT # 4 of 6
*wm:No wifi saved, skipping
*wm:Connect Wifi, ATTEMPT # 5 of 6
*wm:No wifi saved, skipping
*wm:Connect Wifi, ATTEMPT # 6 of 6
*wm:No wifi saved, skipping
*wm:AutoConnect: FAILED for 6004 ms
*wm:StartAP with SSID: ESP_F6129C
*wm:AP IP address: 192.168.4.1
*wm:[ERROR] country code not found
*wm:Starting Web Portal
```


For your MicroIndicator to download the latest data, it needs to connect to the internet through your wifi. To give it the wifi password, connect the hotspot it just created.

In the above case, it's called `ESP_F6129C`, and it'll open a captive portal when you connect:




If it doesn't automatically pop up for you, go to <http://192.168.4.1/> in any web browser.

If you connect successfully, press `Configure Wifi`:

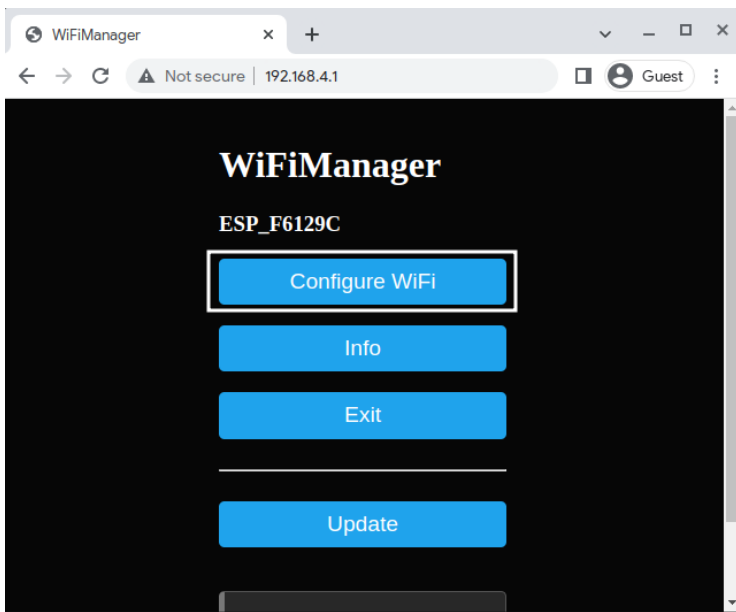

Then, you can click your Wifi network in the scan results, enter your Wifi Password, and save.

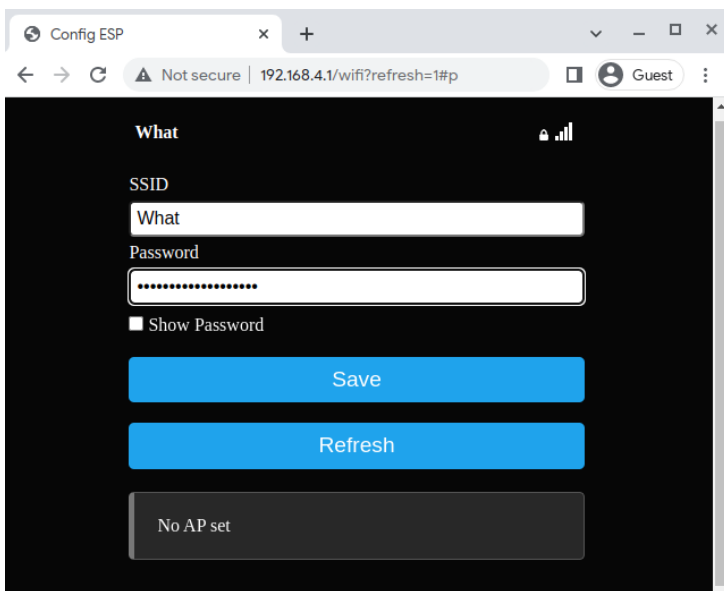

If your wifi network doesn't show in the scan results, your NodeMCU might not support it. Please ensure the wifi network has 2.4 GHz support and your NodeMCU is close enough to the router.

Once saved, it should connect!


```
...  
wm:2 networks found  
*wm:Connect Wifi, ATTEMPT # 1 of 6  
*wm:Connecting to NEW AP: What  
*wm:connectTimeout not set, ESP waitForConnectResult...  
*wm:Connect to new AP [SUCCESS]
```

```
*wm:Got IP Address:  
*wm:192.168.130.9  
*wm:config portal exiting  
Wifi Setup Complete
```

If it can connect back to the DirtyWatts Server, it'll start spitting out stats about the power grid:

```
#####  
  
Got power stations:  
Battery generation: 0.00  
Co-gen generation: 118.00  
Coal generation: 102.00  
Gas generation: 209.00  
Geothermal generation: 796.00  
Hydro generation: 2702.00  
Diesel generation: 0.00  
Wind generation: 378.00  
  
Calculations:  
Percent renewable: 0.90  
Color: 174, 74, 0  
Power socket: 0  
  
#####
```

If it doesn't and instead fails to connect to the server, it could be because of many reasons. It could be due to a captive portal on the wifi blocking access, in which case you will need to find a different wifi network or the Dirtywatts API is offline for everyone!

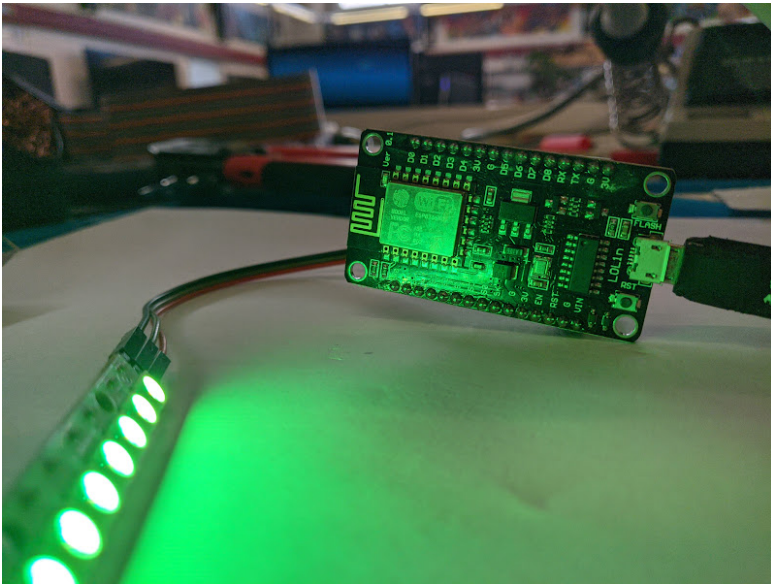

Revision #10

Created 13 April 2023 10:40:04 by Admin

Updated 16 April 2023 10:14:52 by Admin